

S2255RT

COMPACT ROUGH TERRAIN SCISSOR LIFT



- Compact diesel rough terrain scissor lift
- Excellent rough terrain performance
- Easy to Operate
- Roll-out deck extension for extra reach
- Ideal for outdoor work in confined spaces

 **snorkel**
www.snorkellifts.com

COMPACT ROUGH TERRAIN SCISSOR LIFT

S2255RT



DIMENSIONS	S2255RT
Max. working height	8.5m
Max. platform height (A)	6.5m
Platform size (stowed)	2.73m x 1.4m
Platform size (extended)	3.93m x 1.4m
Deck extension length	1.2m
Overall width (B)	1.45m
Overall length (C)	3.3m
Stowed height (D)	2.35m
Ground clearance	260mm

PERFORMANCE	
Platform capacity (SWL)	420kg
Max. drive height	6.5m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	5.2km/h
Max. drive speed (elevated)	0.66km/h
Raise/lower time	26/30 sec
Gradeability	35%
Max. outrigger levelling, front to rear	6°
Max. outrigger levelling, side to side	10°
Inside turning radius	2.5m
Outside turning radius	4.75m
Exit/entry angle	20°
Tyres	23" x 8.9" - 12 non-marking
Controls	proportional joystick
Drive system	4 wheel drive

POWER	
Power source	Kubota diesel engine

WEIGHT	
Weight	2,360kg

TURNING RADIUS

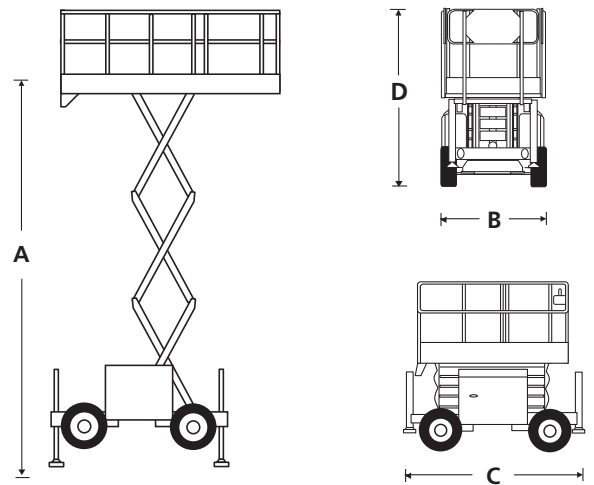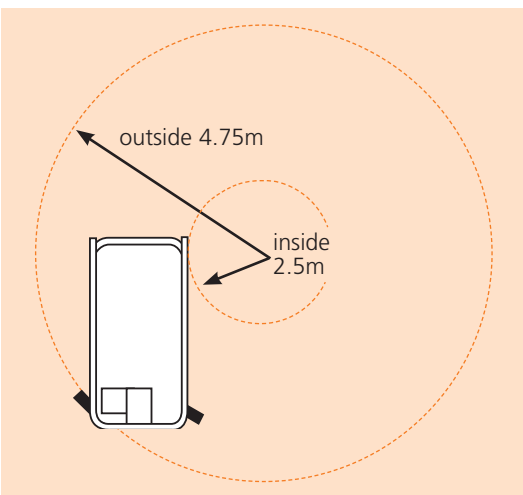

STANDARD FEATURES

- 4 wheel drive
- 4 hydraulic outriggers with automatic levelling
- Roll-out deck extension
- Proportional controls
- Non-marking tyres
- Power line to platform
- Drive motion alarm
- Descent alarm
- Manual lowering valve
- Flashing amber light
- Dual lanyard attachment points
- Oscillating axle
- Hour meter
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Bi-energy
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales@snorkellifts.com