

S2755RT

COMPACT ROUGH TERRAIN SCISSOR LIFT



- Compact diesel rough terrain scissor lift
- Excellent rough terrain performance
- Easy to Operate
- Roll-out deck extension for extra reach
- Ideal for outdoor work in confined spaces

 **snorkel**
www.snorkellifts.com

DIMENSIONS S2755RT

Max. working height	10.4m
Max. platform height (A)	8.4m
Platform size (stowed)	2.73m x 1.4m
Platform size (extended)	3.93m x 1.4m
Deck extension length	1.2m
Overall width (B)	1.45m
Overall length (C)	3.3m
Stowed height (D)	2.5m
Ground clearance	260mm

PERFORMANCE

Platform capacity (SWL)	300kg
Max. drive height	8.4m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	5.2km/h
Max. drive speed (elevated)	0.5km/h
Raise/lower time	26/30 sec
Gradeability	35%
Max. outrigger levelling, front to rear	6°
Max. outrigger levelling, side to side	10°
Inside turning radius	2.5m
Outside turning radius	4.75m
Tyres	23" x 8.9" - 12 non-marking
Controls	Proportional joystick
Drive system	4 wheel drive



POWER

Power source	Kubota diesel engine
--------------	----------------------

WEIGHT

Weight	2,580kg
--------	---------

TURNING RADIUS

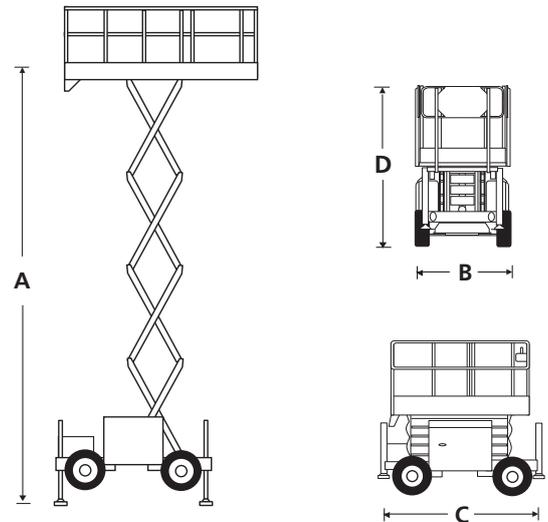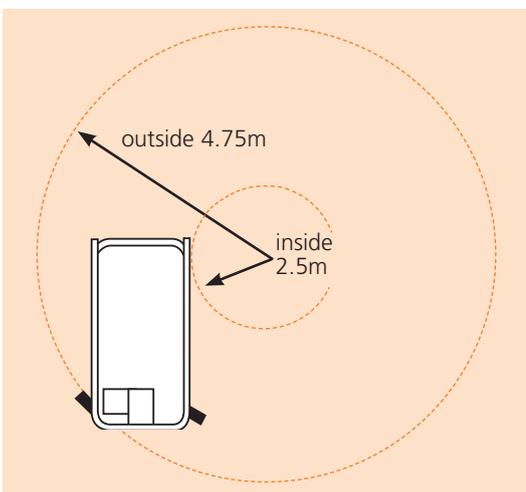

STANDARD FEATURES

- 4 wheel drive
- 4 hydraulic outriggers with automatic levelling
- Roll-out deck extension
- Non-marking tyres
- Proportional controls
- Power line to platform
- Drive motion alarm
- Descent alarm
- Manual lowering valve
- Flashing amber light
- Dual lanyard attachment points
- Oscillating axle
- Hour meter
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Bi-energy
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales@snorkellifts.com