

S3220E/S3226E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Roll-out extension decks for extra reach
- Suitable for indoor and outdoor use (S3220E)
- Ideal for construction & maintenance applications

 **snorkel**
www.snorkellifts.com

ELECTRIC SLAB SCISSOR LIFTS

S3220E/S3226E



| DIMENSIONS | S3220E | S3226E |
|---------------------------------|---------------|---------------|
| Max. working height | 8.1m | 9.9m |
| Max. platform height (A) | 6.1m | 7.9m |
| Platform size (stowed) | 0.72m x 2.14m | 0.72m x 2.14m |
| Platform size (extended) | 0.72m x 2.6m | 0.72m x 2.6m |
| Extension deck length (B) | 0.91m | 0.91m |
| Overall length (with step) (D) | 2.3m | 2.3m |
| Overall length (without step) | 2.26m | 2.26m |
| Overall width (C) | 0.81m | 0.81m |
| Stowed height (E) | 2.17m | 2.3m |
| Min. height (guardrails folded) | 1.72m | 1.85m |
| Ground clearance (stowed) | 95mm | 95mm |
| Ground clearance (elevated) | 19mm | 19mm |

| PERFORMANCE | | |
|-----------------------------|---------------------------|-----------|
| Platform capacity | 407kg | 250kg |
| Max. drive height | 6.1m | 7.9m |
| Max. wind speed | 12.5m/s | 0m/s |
| Max. drive speed (stowed) | 3.2km/h | 3.2km/h |
| Max. drive speed (elevated) | 0.6km/h | 0.6km/h |
| Raise/lower time | 34/43 sec | 50/56 sec |
| Gradeability | 25% | 25% |
| Inside turning radius | 0.76m | 0.76m |
| Outside turning radius | 2.36m | 2.36m |
| Tyres | 15 x 4 non-marking rubber | |
| Controls | proportional | |
| Drive system | 2 wheel drive | |

| POWER | |
|--------------|-------------------------|
| Power source | 24V DC battery electric |
| Charger | 90 - 240V, 25amp |

| WEIGHT | | |
|--------|---------|---------|
| Weight | 2,045kg | 2,045kg |

TURNING RADIUS

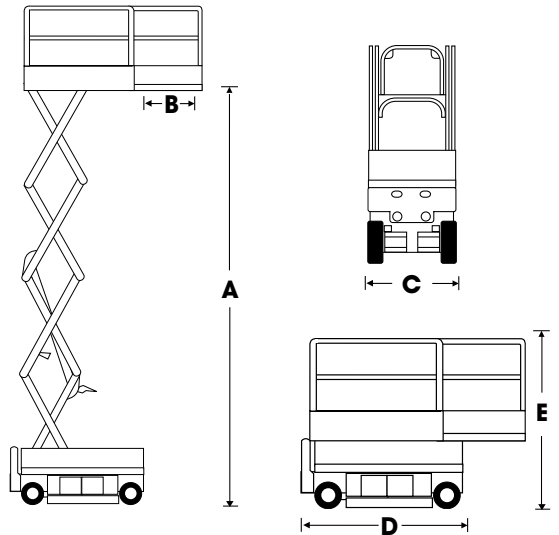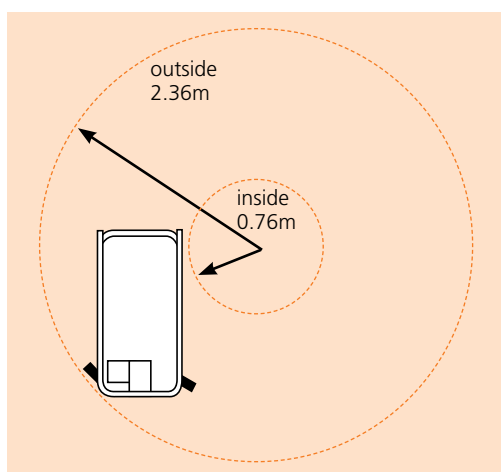

STANDARD FEATURES

- Roll-out deck extension with dual locks
- Non-marking tyres
- Loading control pendant
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- Key switch
- 2 persons + equipment capacity indoor
- 1 person + equipment capacity outdoor (S3220E)
- Proportional controls, including descent
- Power line to platform
- Hour meter & onboard diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachments points
- Flashing amber light
- Scissor stack roller slide plates (set of 2)
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Environmental hydraulic oil
- Airline to platform
- Aircraft bumpguard package

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales.emea@snorkellifts.com