

S3019E

ELECTRIC DRIVE SLAB SCISSOR LIFT



- Self-propelled electric mini scissor lift
- Low level entry
- Drives through a standard doorway
- Suitable for indoor and outdoor use
- Easy to use & maintain

 **snorkel**
www.snorkellifts.com

ELECTRIC DRIVE SLAB SCISSOR LIFT

S3019E

DIMENSIONS S3019E

Max. working height	7.79m
Max. platform height (A)	5.79m
Platform size (stowed)	0.61m x 1.69m
Platform size (extended)	0.61m x 2.6m
Deck extension length	0.91m
Overall length (C) (with step)	1.91m
Overall width (D)	0.77m
Stowed height (B)	1.76m
Ground clearance (stowed)	76mm
Ground clearance (elevated)	15mm

PERFORMANCE

Platform capacity (SWL)	250kg
Max. drive height	5.79m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	2.4km/h
Max. drive speed (elevated)	0.8km/h
Raise/lower time	30/44sec
Gradeability	25%
Inside turning radius	0m
Outside turning radius	1.77m
Tyres	323mm x 102mm non-marking solid rubber
Controls	proportional
Drive system	2 wheel drive



POWER

Power source	24V DC battery electric
Charger	90-240V, 25amp

WEIGHT

Weight	1,581kg
--------	---------

TURNING RADIUS

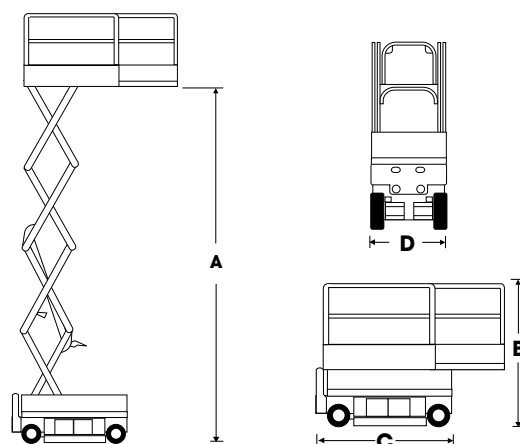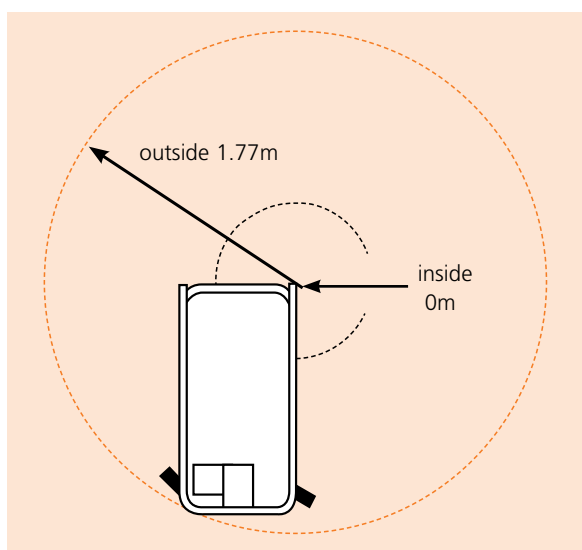

STANDARD FEATURES

- All electric drive
- Electric steer
- No hydraulic hoses
- Roll-out deck extension with dual locks
- Non-marking tyres
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- Key switch
- 2 persons indoors
- 1 person outdoors
- Proportional controls, including descent
- Power line to platform
- Hour meter & on-board diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachments points
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Flashing amber light
- Airline to platform
- Environmental hydraulic oil

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales.emea@snorkellifts.com