SR626

COMPACT ROUGH TERRAIN TELEHANDLER



- Full-time 4 wheel drive
- Fully enclosed cab
- Power assisted steering
- Proportional joystick controls
- Simple to operate & maintain



COMPACT ROUGH TERRAIN TELEHANDLER

SR626

| CAPABILITIES | SR626 |
|-------------------------------|---------|
| Max. lift capacity | 2,600kg |
| Max. lift height (A) | 5.79m |
| Max. forward reach | 3.2m |


| DIMENSIONS | |
|----------------------------------|-------|
| Overall width (B) | 1.89m |
| Stowed height (C) | 1.93m |
| Length to fork face (D) | 4.19m |
| Wheelbase | 2.5m |
| Ground clearance | 220mm |


| PERFORMANCE | |
|-----------------------------|-----------|
| Max. drive speed | 27km/h |
| Raise/lower time | 6.9/5 sec |
| Frame levelling | n/a |
| Hydraulic flow (per minute) | 70L |
| Hydraulic pressure | 230bar |
| Hydraulic oil capacity | 70L |
| Fuel capacity | 80L |
| Outside turning radius | 3.25m |
| Tyres | 12 x 16.5 |

| POWER | |
|--------------|-------------------------------------|
| Power source | Yanmar 51.7kW - Tier 4 Final diesel |

| WEIGHT | |
|--------|---------|
| Weight | 4,700kg |

LOAD CHART

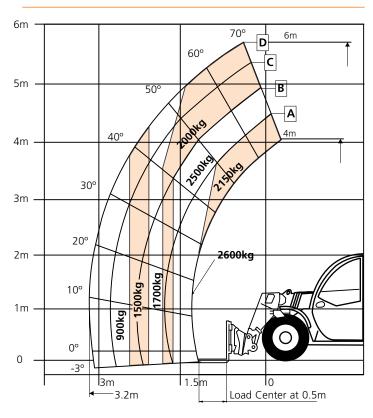



STANDARD FEATURES

- Full time 4 wheel drive
- 4 wheel steer
- Selectable front, crab & coordinated steering modes
- Auxillary hydraulic circuit on the boom
- Variable speed hydrostatic drive
- Fender (set of 4)
- Fully enclosed cab with air conditioning
- Proportional joystick controls
- Adjustable steering column
- Illuminated guage and switch panels
- Colour LCD display with machine & engine diagnostics
- Block heater
- Adjustable suspension seat
- Flashing beacon
- Road lights
- Fixed 1,200mm carriage
- 1,200mm x 1,500mm x 800mm pallet forks
- Work lights on boom (2)
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

Front and rear work LED lights

Ssnorkel

Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales.emea@snorkellifts.com